



The Benchtop multi-purpose lubrication and used oil tank is excellent for use in areas where maximum use of storage and work space is needed. These UL-142 Listed tanks are constructed of quality steel with heavy duty work surfaces and equipped to accommodate hose reel, pump, gauge, and fill cap accessories.

A complete selection of Containment Solutions storage systems are available nationwide. Our experienced sales staff is ready to assist you in selecting the tank best suited to fit your needs, or to custom design a complete system for you.



2212 Camplain Road
Hillsborough, NJ 08844
1-888-8FC-LIFT

STANDARD FEATURES:

- UL-142 listed
- Shop primed exterior
- 2" retainer lip on back and sides
- Skid mounted for easy installation
- Hose reel/pump mounting plate
- NPT fittings with PVC plugs
- Heavy duty work surface

OPTIONS:

- Corrosion resistant exterior coating
- 7 gallon spill box
- Fill cap
- Level gauges
- Suction tube with kamlock and dust cap
- Fill hatch with screen
- Compartments available
- Equipment packages Equipment packages




The Bench Top can be designed with custom compartments for multi-purpose use.

STANDARD SINGLE-WALL SIZES:

CAPACITY (GALLONS)	LENGTH	WIDTH	HEIGHT	SHIPPING WEIGHT
180	5'1"	1'11"	3'0"	440 LBS.
240	5'1"	2'7"	3'0"	520 LBS.
350	5'1"	3'7"	3'0"	560 LBS.
450	6'7"	3'7"	3'0"	680 LBS.
500	6'7"	4'3"	3'0"	815 LBS.

- A. 12" sq. x 2" deep Pump Mount Plate
- B. 2" Spare
- C. 2" Pump Supply
- D. 2" Gauge
- E. 4" Primary Emergency Vent
- F. 2" Spare
- G. 2" Primary Working Vent
- H. Optional 12" sq. x 12" deep 7 Gallon Spillbox w/ 1/2" NPT Drain
- I. 1/2" NPT Drain w/Optional Spillbox
- J. 2" Fill
- K. Support Feet (C4 x 5.4# Channel)
- L. Primary Tank with Corrosion Resistant Exterior (Standard Coating: Desert Sand Epoxy)

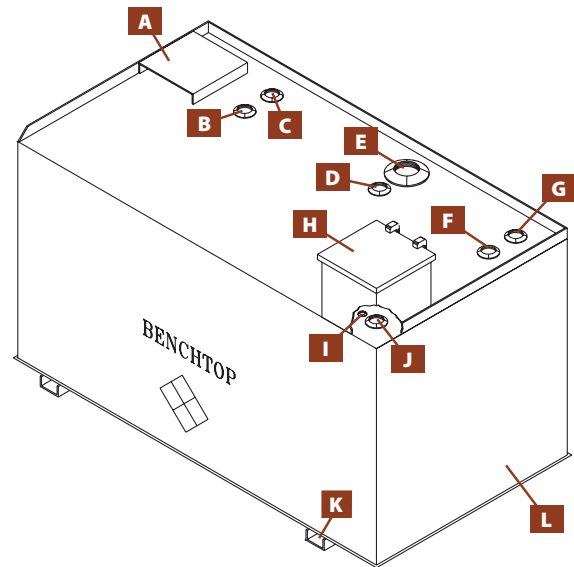


Single-Wall BenchTop Tank

STANDARD DOUBLE-WALL SIZES:

CAPACITY (GALLONS)	LENGTH	WIDTH	HEIGHT	SHIPPING WEIGHT
180	5'8"	2'1"	3'1"	835 LBS.
240	5'8"	2'9"	3'1"	960 LBS.
350	5'8"	3'9"	3'1"	1,060 LBS.
450	7'2"	3'9"	3'1"	1,265 LBS.
500	6'8"	4'5"	3'1"	1,525 LBS.

- A. 12" sq. x 2" deep Pump Mount Plate
- B. 2" Spare
- C. 2" Pump Supply
- D. 2" Gauge
- E. 4" Primary Emergency Vent
- F. 2" Spare
- G. 2" Primary Working Vent
- H. Optional 12" sq. x 12" deep 7-gallon Spillbox w / 1/2" NPT drain
- I. 1/2" NPT Drain w / Optional Spillbox
- J. 2" Fill
- K. Support Feet (C4 x 5.4# Channel)
- L. Primary Tank
- M. Secondary Tank with Corrosion Resistant Exterior (Standard Coating: Desert Sand Epoxy)
- N. 4" Secondary Containment Emergency Vent
- O. 2" Secondary Containment Monitoring Port
- P. 2" Secondary Containment Working Vent

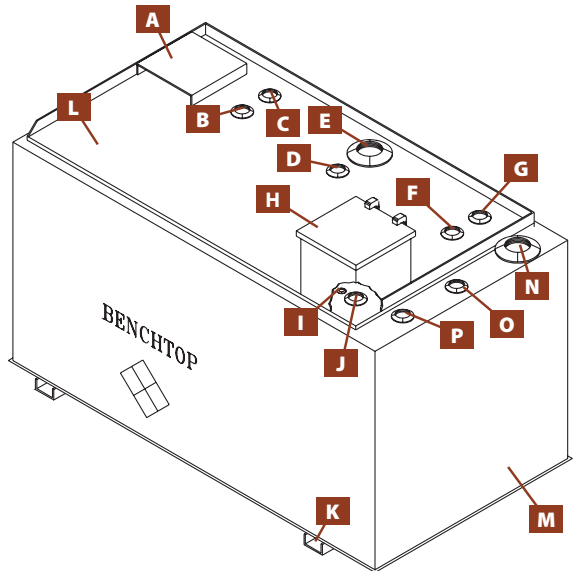

Double-Wall BenchTop Tank



CONTAINMENT SOLUTIONS®

