



Lube Cube® lube oil tanks are the best solution for storage of new and used lubrication oils. Lube Cubes provide lower installed costs than underground tanks, better space utilization than cylindrical aboveground tanks and lower operation costs than 55-gallon drums.

Lube Cube Tanks are designed for easy and convenient installation either indoors, in service bays or basements, or outdoors, next to the building. Lube Cube's rectangular shape allows for the storage of up to 20% more volume in a given space than comparable cylindrical tank capacities.

Lube Cubes are available as either single or double-wall tanks. Double-wall tanks are UL listed as integral secondary containment and therefore do not require dikes for leak containment.

Desert sand primer finish is standard. Special colors, coatings and interior linings, custom dimensions and equipment packages are available upon request.



2212 Camplain Road
Hillsborough, NJ 08844
1-888-8FC-LIFT

STANDARD FEATURES:

- UL-142 listed
- Meets NFPA 30 Standard
- Skid mounted for easy installation
- Shop primed exterior
- Moveable by forklift
- NPT fittings with PVC plugs
Single-Wall: 5 (plus emergency vent opening)
Double-Wall: above fittings (plus emergency vent and inspection opening)
- Lifting lugs

OPTIONS:

- Corrosion resistant exterior coating
- 7 gallon spill box
- Custom sizes
- Compartments available
- Stainless-steel construction
- Interior coatings
- Equipment packages





Lube Cube tanks are available in standard sizes from 60 to 20,000 gallons.

STANDARD SINGLE-WALL SIZES:

CAPACITY (GALLONS)	LENGTH	WIDTH	HEIGHT	SHIPPING WEIGHT
60	1'4"	2'8"	2'10"	175 LBS.
120	2'7"	2'8"	2'10"	300 LBS.
280	4'3"	2'8"	3'10"	500 LBS.
480	5'1"	3'8"	3'10"	700 LBS.
500	4'3"	3'8"	4'10"	725 LBS.
650	5'5"	3'8"	4'10"	850 LBS.
1,000	8'5"	3'8"	4'10"	1,200 LBS.
1,500	12'5"	3'8"	4'11"	2,150 LBS.
2,000	12'10"	4'8"	4'11"	2,575 LBS.
2,500	16'1"	4'8"	4'11"	3,200 LBS.
3,000	19'3"	4'8"	4'11"	3,450 LBS.
4,000	21'1"	4'8"	5'11"	4,875 LBS.
5,000	15'11"	7'8"	5'11"	6,350 LBS.
6,000	19'1"	7'8"	5'11"	7,350 LBS.
8,000	18'9"	7'8"	7'11"	8,575 LBS.
10,000	23'5"	7'8"	7'11"	10,350 LBS.
12,000	28'1"	7'8"	7'11"	12,125 LBS.
15,000	35'1"	7'8"	7'11"	14,725 LBS.
20,000	46'9"	7'8"	7'11"	18,975 LBS.

STANDARD DOUBLE-WALL SIZES:

CAPACITY (GALLONS)	LENGTH	WIDTH	HEIGHT	SHIPPING WEIGHT
60	1'11"	2'10"	3'1"	385 LBS.
120	3'2"	2'10"	3'1"	485 LBS.
280	4'10"	2'10"	4'1"	850 LBS.
480	5'8"	3'10"	4'1"	1,350 LBS.
500	5'1"	3'10"	5'1"	1,425 LBS.
650	6'3"	3'10"	5'1"	1,525 LBS.
1,000	9'4"	4'0"	5'1"	2,400 LBS.
1,500	13'4"	4'0"	5'1"	3,250 LBS.
2,000	13'9"	5'0"	5'1"	3,760 LBS.
2,500	17'0"	5'0"	5'1"	4,500 LBS.
3,000	20'5"	5'0"	5'1"	6,630 LBS.
4,000	22'3"	5'0"	6'1"	8,130 LBS.
5,000	17'1"	8'0"	6'1"	10,150 LBS.
6,000	20'3"	8'0"	6'1"	11,400 LBS.
8,000	19'11"	8'0"	8'1"	14,000 LBS.
10,000	24'7"	8'0"	8'1"	16,125 LBS.
12,000	29'3"	8'0"	8'1"	18,535 LBS.
15,000	36'3"	8'0"	8'1"	22,100 LBS.
20,000	48'2"	8'0"	8'1"	28,900 LBS.

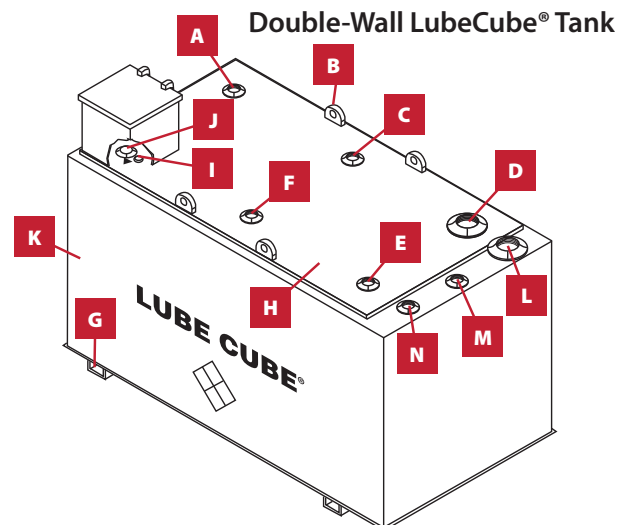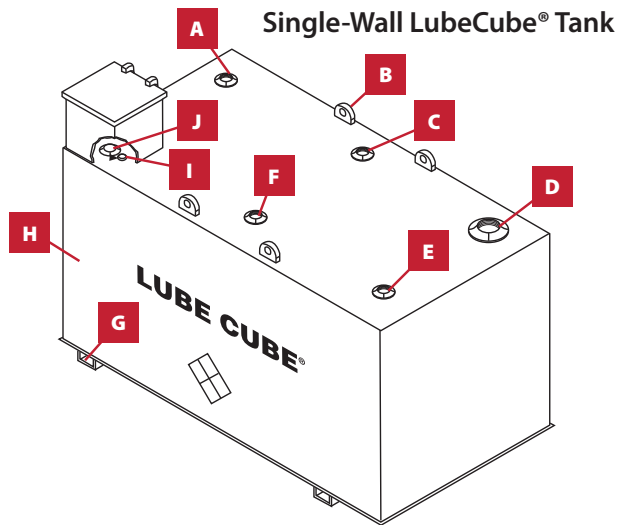

A. Spare 2" or 4"

B. Lifting Lugs
(2) 60 - 650 Gallon
(4) 1,000 - 20,000 Gallon

C. 2" Primary Working Vent

D. Primary Tank Emergency Vent
4", 6", 8", or 10"

E. 2" Spare

F. 2" Gauge

G. Support Feet

H. Primary Tank
*(SW - Corrosion Resistant Desert Sand
Primer Exterior Coating)*

I. ½" NPT Drain with Optional Spill Box

J. Fill - 2", 4" or 6"

K. Secondary Tank with Corrosion
Resistant Desert Sand
Primer Exterior Coating

L. Secondary Containment
Emergency Vent 4", 6", 8" or 10"

M. 2" Monitor Point

N. 2" Secondary Containment
Working Vent



**CONTAINMENT
SOLUTIONS®**

