

Solenoid Valves



For use with the 007 tank monitor.

007 SV Solenoid Valve

- Low voltage solenoid valve.
- Shuts off air to pump when 007 is in alarm condition.
- Can be located up to 350' away from 007.
- Wall mount transformer included.
- 12V DC.
- 1/2" NPT Ports.
- 10-200 PSI.

007 SVT Solenoid Valve with Timer


- Same as 007SV with added timer.
- SAVE TIME AND MONEY!
- Shuts off pump, saving labor time and equipment failure due to unattended pump station.
- Simply turn knob to desired time (3-15 min.) and get back to the job.

Heavy Duty 007 Power Relay

- SPDT [N/O or N/C] dry contacts for a variety of applications, i.e. drive electric pumps, turn lights on/off, etc.
- SPDT [N/O or N/C] dry contacts for a variety of applications, i.e. drive electric pumps, turn lights on/off, etc.

Specifying Information

MODEL NO.	DESCRIPTION	SHIPPING WEIGHT LBS (KG)
7645	Heavy Duty Power Relay for 007 Tank Gauge - 30 AMP or 1/2" HP at 120 or 240 VAC	
7570	007 SVT Solenoid Valve with Timer - 12 Volt Electric (includes wall mount transformer)	
7580	007 SV Solenoid Valve - 12 Volt Electric (includes wall mount transformer)	

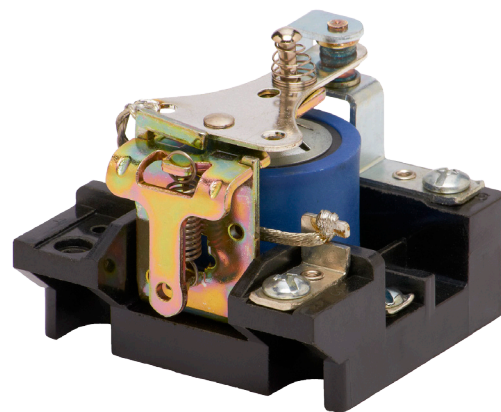




For use with the 007 tank monitor.

Dimensions and System Options

Repair Parts

MODEL NO.	DESCRIPTION
7714	TT25 3/16" MJIC x 3/16" Elbow Adaptor
7863	TT12, TT25 Push Plate
7929	TT25 Ram
7734	TT25 Pump
7899	TT25 Handle Spring
7904	C4, C6, TT12, TT25 3/8" Ball Bearing Switch
7905	C4, C6, TT12, TT25 Safety Switch Spring
7906	C4, C6, TT12, TT25 1/4" x 2-1/4" Clevis Pin
7907	C4, C6, TT12, TT25 3/8" ID x 1/2" OD Bearing
7908	C4, C6, TT12, TT25 1/4" x 1 1/2" Clevis Pin
7909	C4, C6, TT12, TT25 3/32" x 1/2" Cotter Pin
7917	C4, C6, TT12. TT25 3/8" x 2-1/4" Grade 8 Tap Bolt
7918	C4, C6. TT12, TT25 3/8" x 16 Stover Nut
7938	C4, C6, TT12, TT25 5/16" Flat Washer

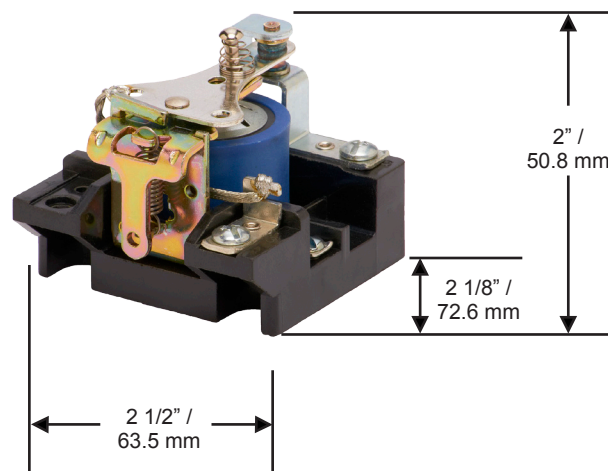

2325 Husky Way • Pacific, MO 63069
 (800) 325-3558 • Fax (636) 825-7300
www.husky.com • sales@husky.com



2212 Camplain Road
 Hillsborough, NJ 08844
 1-888-8FC-LIFT

MADE IN THE U.S.A.