

SYMMETRIC LIFTS *WIDER DRIVE THRU FOR TRUCKS AND VANS*



SPO10 10,000 LBS. CAPACITY
THE PROVEN STANDARD

Trust the industry standard symmetrical 10,000 lb. lift. Why look anywhere else?

- Customize with your choice of arms and adapters
- Original "Double S" column design
- Available with conventional 3-stage arms
- Available in extended height configurations
- ALI Gold Certified



Available with **SHOCKWAVE™** SHOCKWAVE-Equipped SPO10-SW Minimum Required Ceiling Height: 12' 6"



Lift shown with conventional three-position flip-up adapters with built-in height adapters on 2-stage arms

Model #SPO10 10,000 lbs. capacity

ALSO AVAILABLE WITH

- Three-stage arms with RA Adapters Model #SPO10-RA / 10,000 lbs. capacity



- Three-stage arms with Truck Adapters Model #SPO10-TA / 10,000 lbs. capacity



Model shown: SPO10N707RD extended height lift Shown with optional accessories and additional equipment

SPO12 12,000 LBS. CAPACITY

THREE STAGE ARMS for GREATER REACH

The Rotary SPO12 is the choice for medium-duty lifting and quality in 12,000 lb. lifts.

- Front & rear three-stage arms are standard
- Adjustable truck adapters with stackable inserts for added reach
- Low ceiling and extended height models available
- Original "Double S" column design
- ALI Gold Certified



Available with **SHOCKWAVE™**



Standard with three-stage FRONT arms and polymer truck adapters primarily used on framed vehicles. Adjustable adapters thread-up and come with stackable inserts and storage rack

Model #SPO12-TA 12,000 lbs. capacity



Model shown: SPO12N7TOBL Shown with optional accessories and additional equipment



Model: SPO12U7T8RD - shown with optional accessories and additional equipment

Available with **SHOCKWAVE™**



SPO10
Standard Arms
Flip Up Adapters



SPO10-RA
Three-Stage Arms
Round Adapters




SPO10-TA
Three-Stage Arms
Truck Adapters



SPO12-TA
Three-Stage Arms
Truck Adapters

Model:	SPO10 Standard Arms Flip Up Adapters	SPO10-RA Three-Stage Arms Round Adapters	SPO10-TA Three-Stage Arms Truck Adapters	SPO12-TA Three-Stage Arms Truck Adapters
SHOCKWAVE Models	SPO10-SW SHOCKWAVE LIFT	SPO10-RASW SHOCKWAVE LIFT	SPO10-TASW SHOCKWAVE LIFT	SPO12-SW SHOCKWAVE LIFT
Rise*	72 5/8" - 78 1/8" (1845 - 1984mm)	72 1/2" - 74 3/4" (1841 - 1898mm)	72 5/8" - 75 5/8" (1845 - 1921mm)	72 3/4" - 75 3/4" (1848 - 1924mm)
WITH SHOCKWAVE	75 5/8" - 81 1/8" (1921 - 2061mm)	75 1/2" - 77 3/4" (1918 - 1978mm)	75 5/8" - 78 5/8" (1921 - 1997mm)	75 3/4" - 78 3/4" (1924 - 2000mm)
Height Overall: Standard	11' 8 1/2" (3569mm)	11' 8 1/2" (3569mm)	11' 8 1/2" (3569mm)	13' 8" (4166mm)
EH1 - adds 3" of rise height	12' 8 1/2" (3873mm)	12' 8 1/2" (3873mm)	12' 8 1/2" (3873mm)	14' 8" (4470mm)
EH2 - adds 3" of rise height	13' 8 1/2" (4178mm)	13' 8 1/2" (4178mm)	13' 8 1/2" (4178mm)	15' 8" (4775mm)
EH3 - adds 3" of rise height	N/A	N/A	N/A	16' 8" (5080mm)
Width Overall** (outside of base plate)	11' 5 1/2" (3493mm)	11' 5 1/2" (3493mm)	11' 5 1/2" (3493mm)	11' 5 5/8" (3496mm)
Drive-Thru Clearance	102 1/2" (2603mm)	102 1/2" (2603mm)	102 1/2" (2603mm)	102 3/8" (2600mm)
Floor To Overhead Switch	11' 2 3/4" (3423mm)	11' 2 3/4" (3423mm)	11' 2 3/4" (3423mm)	13' 3 1/8" (4042mm)
Reach (front arm min.)	31" (787mm)	27 1/2" (699mm)	27 1/2" (699mm)	27 1/2" (699mm)
Reach (front arm max.)	54" (1372mm)	59" (1499mm)	59" (1499mm)	59" (1499mm)
Reach (rear arm min.)	31" (787mm)	27 1/2" (699mm)	27 1/2" (699mm)	27 1/2" (699mm)
Reach (rear arm max.)	54" (1372mm)	59" (1499mm)	59" (1499mm)	59" (1499mm)
Min. Adapter Height	4 5/8" (118mm)	4 1/2" (114mm)	4 5/8" (143mm)	4 3/4" (121mm)
Max. Adapter Height	N/A	6 3/4" (171mm)	7 5/8" (194mm)	7 3/4" (197mm)
Low Step Height	7" (178mm)	N/A	N/A	N/A
High Step Height	10 1/4" (260mm)	N/A	N/A	N/A
Inside Columns	114 1/2" (2908mm)	114 1/2" (2908mm)	114 1/2" (2908mm)	114 7/8" (2918mm)
Cylinder Height at full rise*	11' 10 3/4" (3626mm)	11' 10 3/4" (3626mm)	11' 10 3/4" (3626mm)	11' 10 3/4" (3626mm)
WITH SHOCKWAVE	12' 4 1/2" (3772mm)	12' 4 1/2" (3772mm)	12' 4 1/2" (3772mm)	12' 4 1/2" (3772mm)
Lifting Capacity	10,000 lbs. (4536kg)	10,000 lbs. (4536kg)	10,000 lbs. (4536kg)	12,000 lbs. (5443kg)
Motor / Voltage***	2 HP / 208v-230v	2 HP / 208v-230v	2 HP / 208v-230v	2 HP / 208v-230v
WITH SHOCKWAVE	5 HP / 110v	5 HP / 110v	5 HP / 110v	5 HP / 110v
Time of Full Rise	45 seconds	45 seconds	45 seconds	60 seconds
WITH SHOCKWAVE	25 seconds	25 seconds	25 seconds	25 seconds
Ceiling Height Required:				
Standard	12' (3658mm)	12' (3658mm)	12' (3658mm)	13' 9" (4191mm)
WITH SHOCKWAVE	12' 6" (3810mm)	12' 6" (3810mm)	12' 6" (3810mm)	13' 9" (4191mm)
EH1	12' 10" (3912mm)	12' 10" (3912mm)	12' 10" (3912mm)	14' 9" (4496mm)
EH2	13' 10" (4216mm)	13' 10" (4216mm)	13' 10" (4216mm)	15' 9" (4801mm)
EH3	N/A	N/A	N/A	16' 9" (5105mm)
Max Load (per arm)	2,500 lbs. (1134kg)	2,500 lbs. (1134kg)	2,500 lbs. (1134kg)	3,000 lbs. (1360kg)
Min. Bay Size	12' x 24' (3658 x 7315mm)	12' x 24' (3658 x 7315mm)	12' x 24' (3658 x 7315mm)	12' x 26' (3658 x 7925mm)

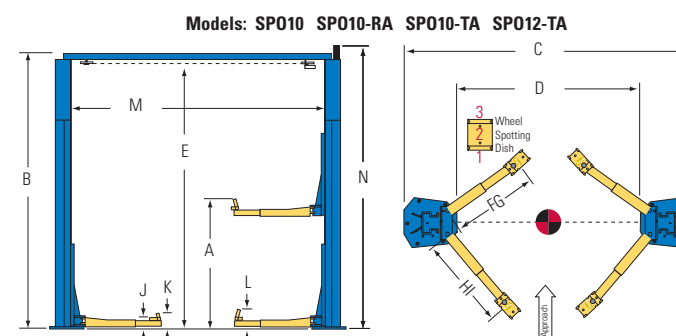

* Rise measures lowest or highest position of the supplied adapters from floor to full cylinder stroke.
** Overall heights and widths reflect standard settings. Alternate settings may be available, refer to Installation Instruction Manual or consult factory for details.
***Optional 3-phase electrical available.

Standard color of lifts are blue and red unless otherwise noted. Gray and black are available at no additional charge. Additional colors are available, consult your Rotary® representative for details.

	RAL5005		RAL3002
	RAL7040		RAL9005