



Quick Service Lifts

7,000 lbs. Capacity Moveable Pad Lift



Faster Service. More Revenue.

The quick service pad lift includes time saving features that help get your customers in and out fast with efficient, no-appointment necessary maintenance and routine service. The ultra-low profile, easy to adjust pad minimizes drive-over clearance and allows vehicles to be spotted quickly, easily and accurately.

The standard SPOA7-MP two-post features true asymmetric, "Double S" columns for easy door opening and added strength, a padded overhead shut off bar and rugged, time tested construction.

And it's only from Rotary Lift.



Model SPOA7X
7,000 lbs. capacity drive over lift



Lift pads
accommodate
most unibody
vehicles



2212 Camplain Road
Hillsborough, NJ 08844
1-888-8FC-LIFT



Model SPOA7X
7,000 lbs. capacity drive over lift



Adjustable Drive-Over Pad

Spotting a vehicle is quick
with easy to move pads.

The World's Most Trusted Lift™


www.rotarylif.com

Quick Service Lifts 7,000 lbs. Capacity

SHOCKWAVE-Equipped Lifts Include:

- 2 Times Faster Rise and Descent*
- Spotline™ Laser Spotting System
- 110v DC Power

Adjustable Drive-Over Pad MAKES QUICK SERVICE WORK AS EASY AS 1-2-3!

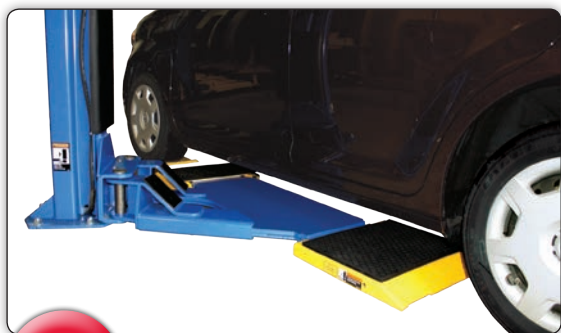

1

Low drive-over clearance of 2-5/8" minimizes vehicle spotting time



2

Rubber spacer blocks (included with the lift) provide additional clearance when needed.




3

Raise the vehicle for quick service.

* 2 X FASTER BASED ON RISE & DESCENT OF "STANDARD" TWO-POST LIFTS.

IMPROVE YOUR REACH!

Maximum pad measurements


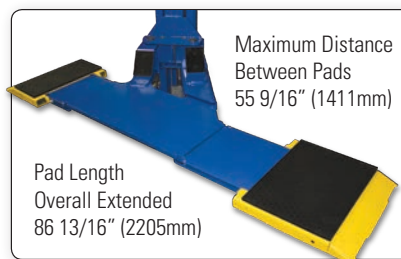


Minimum pad measurements



Model Specifications	SPOA7-MP	SPOA7-MPSW
Lifting Capacity	7,000 lbs. (3157kg)	7,000 lbs. (3157kg)
Lifting Capacity (per platform)	3,500 lbs. (1588kg)	3,500 lbs. (1588kg)
A. Rise**	74"-77" (1880-1956mm)	74"-77" (1880-1956mm)
B. Width Overall	11' 5 3/8" (3489mm)	11' 5 3/8" (3489mm)
C. Floor to Top of Overhead	Standard 11' 8 1/2" (3569mm) EH1 12' 8 1/2" (3874mm) EH2 13' 8 1/2" (4178mm)	11' 8 1/2" (3569mm) 12' 8 1/2" (3874mm) 13' 8 1/2" (4178mm)
C.5 Cylinder at Full Rise	Standard 11' 10 3/4" (3625mm) Extended Option 12' 4 3/4" (3778mm)	12' 4 3/4" (3778mm)
D. Width Between Columns	107" 1/4" (2724mm)	107" 1/4" (2724mm)
E. Floor to Overhead Switch	11' 2 3/4" (3423mm)	11' 2 3/4" (3423mm)
F. Drive Over Clearance	2 5/8" (67mm)	2 5/8" (67mm)
G. Drive-Thru Clearance	79" (2007mm)	79" (2007mm)
H. Outside of Pad to Outside of Pad	78 1/2" (1994mm)	78 1/2" (1994mm)
I. Inside of Pad to Inside of Pad	37 1/8" (968mm)	37 1/8" (968mm)
J. Pad Length Overall Retracted	70 13/16" (1799mm)	70 13/16" (1799mm)
Pad Length Overall Extended	86 13/16" (2205mm)	86 13/16" (2205mm)
K. Minimum Distance Between Pads	39 9/16" (1004mm)	39 9/16" (1004mm)
Maximum Distance Between Pads	55 9/16" (1411mm)	55 9/16" (1411mm)
Motor Performance	2hp	5hp
Voltage Single Phase***	208/230v	110/120v
Speed of Rise	45 seconds	25 seconds

** Rise is measured to top of pad
Rise dimensions increase by 3" with extended rise options
NO PAD: 74" 1 1/2" PAD: 75 1/2" 3" PAD: 77"
*** Optional 3-phase electric available



Rotary World Headquarters
2700 Lanier Drive
Madison, IN 47250, USA
www.rotarylif.com

Contact Information

Sales: p 800.640.5438
f 800.578.5438
e userlink@rotarylif.com
Tech. Support: p 800.445.5438
f 800.822.6502
e userlink@rotarylif.com

GSA Contract Holder
FSS Contract GS07F8953D

FIND US ON



Lit# Rotary_SPOA7_MPs_Cutsheet_2013.02
(SUPERCEDES Lit# MP_2PMoveablePads_Brochure_2012.06)
©2013 VEHICLE SERVICE GROUP™, Printed in U.S.A., All Rights Reserved.
Unless otherwise indicated, ROTARY LIFT, VEHICLE SERVICE GROUP™, DOVER
and all other trademarks are property of Dover Corporation and its affiliates.