



# SAYLOR-BEALL

## AIR COMPRESSORS

ST. JOHNS, MICHIGAN  
989-224-2371 800-248-9001

# SPLASH LUBRICATED AIR COMPRESSORS



2212 Camplain Road  
Hillsborough, NJ 08844  
1-888-8FC-LIFT



451520





VT-735-80



# AMERICAN MADE QUALITY



Saylor-Beall Manufacturing Co. • 400 N. Kibbee St. PO Box 40 • St. Johns, MI 48879  
P 800.248.9001 • F 989.224.8788 • [www.saylor-beall.com](http://www.saylor-beall.com)

## WHAT MAKES A SAYLOR-BEALL?

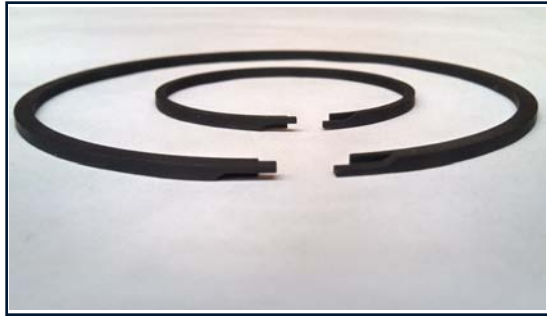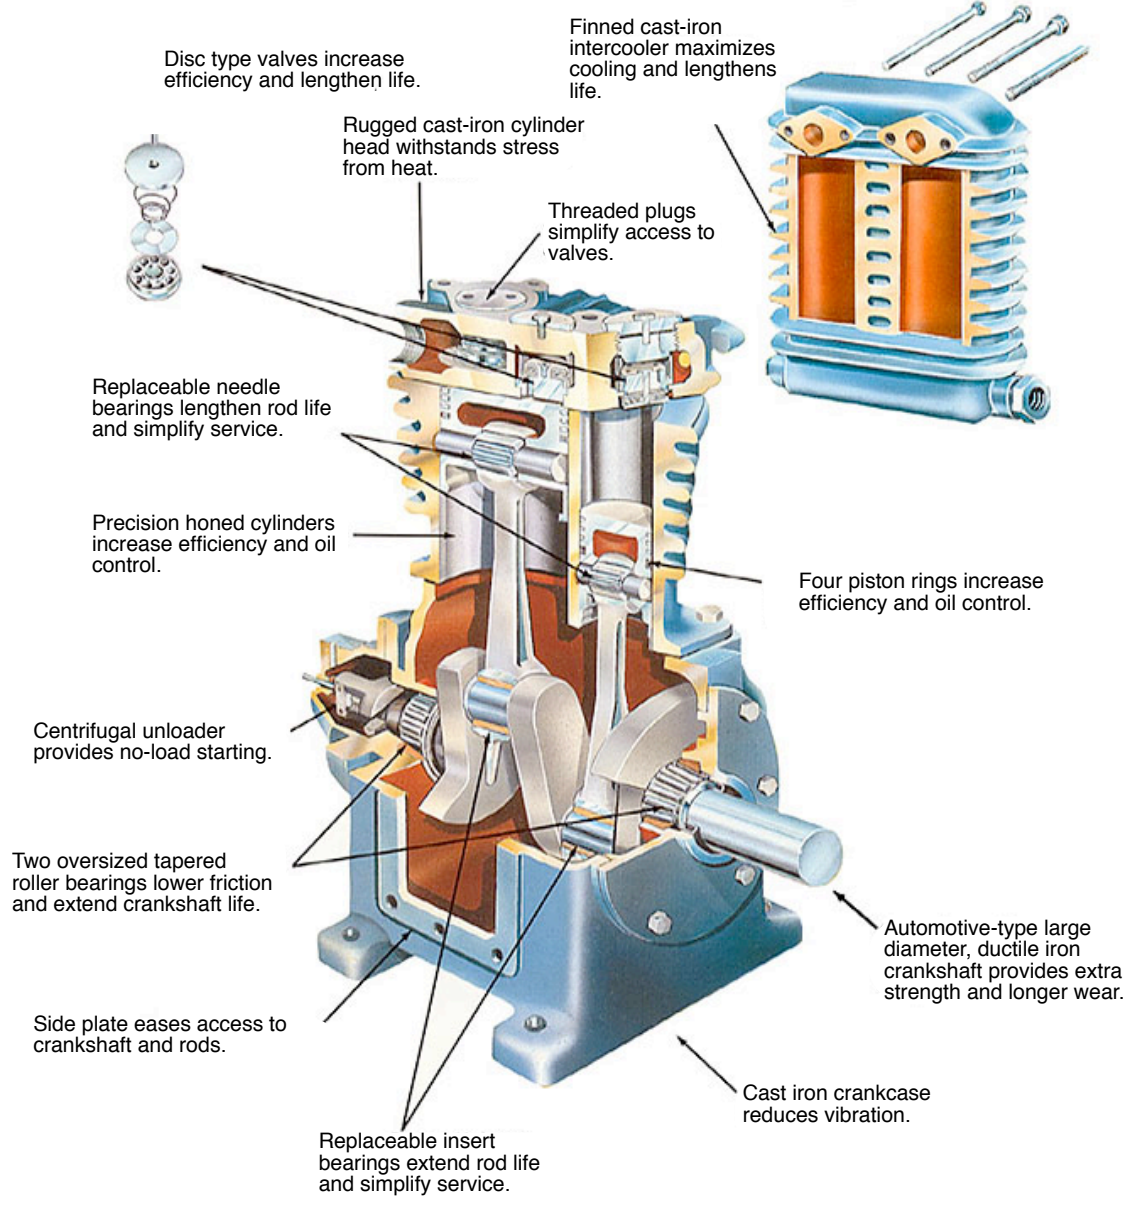

Saylor-Beall uses piston rings specifically designed for two-stage air compressors. They have a special taper and an overlapping joint to eliminate ring gap. This ensures less compressed air blow-by and reduces oil carry-over.

# HORIZONTAL TANK MOUNTED AIR COMPRESSORS

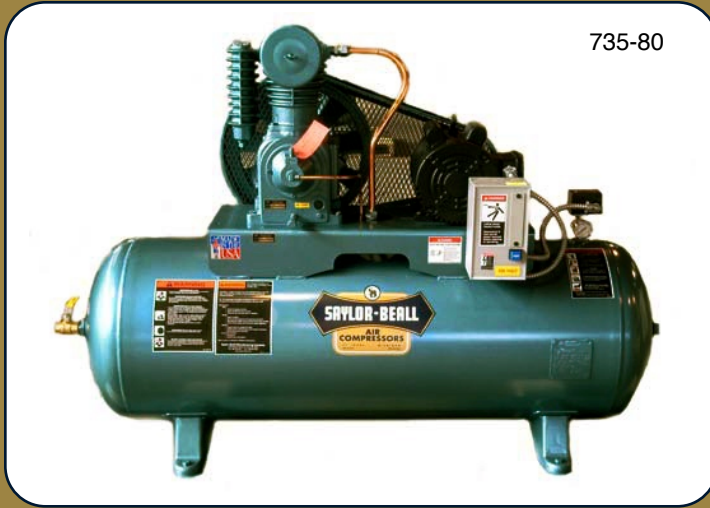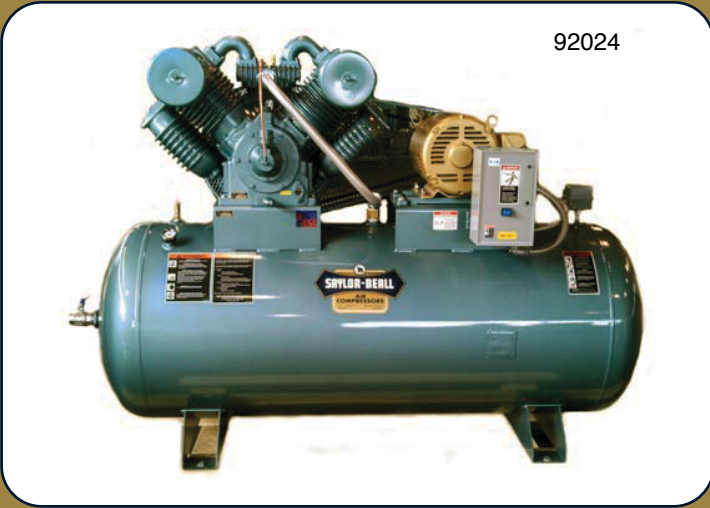

Motor Horse Power	Tank Cap. (Gal)	Splash Lubricated Model	Splash Lubricated Pump	100 PSI Rating			175 PSI Rating			Dimensions LxWxH (inches)	Bolt Down L x W (inches)	Approx. Shipping Wt. (lbs)
				RPM	CFM Displ.	CFM Delvd.	RPM	CFM Displ.	CFM Delvd.			
1½	60	715-60	703	475	9.2	7.3	400	7.8	5.8	48x21x47	28x19	524
	80	715-80								63x21x47	40x19	569
2	60	720-60	703	540	10.5	8.3	510	10.0	7.5	48x21x47	28x19	545
	80	720-80								63x21x47	40x19	590
3	60	730-60	705	575	15.5	12.3	540	14.8	11.1	48x21x47	28x19	567
	80	730-80								63x21x47	40x19	612
	120	730-120								69x24x51	40x19	738
5	60	735-60	705	850	23.0	18.3	845	23.0	17.3	48x21x47	28x19	583
	80	735-80								63x21x47	40x19	628
	120	735-120								69x24x51	40x19	754
	80	737-80	707	515	27.9	22.2	455	24.7	18.5	63x21x47	40x19	717
	120	737-120								69x24x51	40x19	845
7½	80	745-80	707	730	39.4	31.2	655	35.4	26.9	63x21x47	40x19	729
	120	745-120								69x24x51	40x19	855
10	80	755-80	707	850	46.0	36.6	850	46.0	34.4	63x21x47	40x19	749
	120	755-120								69x24x51	40x19	875
	200	451012								4500	665	51.0
15	200	451020	4500	665	51.0	41.8	605	46.4	38.0	78x30x63	40x19	1400
	120	451512	4500	830	63.7	52.2	830	63.7	51.0	75x29x58	40x19	1195
	200	451520								78x30x63	40x19	1434
120	91512	9000								550	84.4	72.1
20	200	91520	9000	550	84.4	72.1	480	73.7	61.2	78x30x63	40x19	1601
	240	92012	9000	665	102.1	86.1	605	92.8	76.1	75x29x56	40x19	1404
	200	92020								78x30x63	40x19	1643
240	92024	85x30x63								51x22½	1858	
25	120	92512	9000	780	119.7	101.6	710	109.0	89.6	75x29x56	40x19	1418
	200	92520								78x30x63	40x19	1657
	240	92524								85x30x63	51x22½	1872
30	120	93012	9000	830	127.4	104.5	830	127.4	101.1	75x29x56	40x19	1439
	200	93020								78x30x63	40x19	1678
	240	93024								85x30x63	51x22½	1893





# SAYLOR-BEALL

## AIR COMPRESSORS

S.T. JOHNS, MICHIGAN  
989-224-2371 800-248-9001



VT-755-120



100% machined, assembled, and tested for quality in our plant in St. Johns, Michigan. We take pride in manufacturing an American made product.

## VERTICAL TANK MOUNTED AIR COMPRESSORS

Motor Horse Power	Tank Cap. (Gal)	Splash Lubricated Model	Splash Lubricated Pump	100 PSI Rating			175 PSI Rating			Dimensions LxWxH (inches)	Bolt Down LxW (inches)	Approx. Shipping Wt. (lbs)
				RPM	CFM Displ.	CFM Delvd.	RPM	CFM Displ.	CFM Delvd.			
1½	80	VT-715-80	703	475	9.2	7.3	400	7.8	5.8	34x26x74	23x23	522
	80	VT-715-80								34x29x74	25½x25½	589
2	80	VT-720-80	703	540	10.5	8.3	510	10.0	7.5	34x26x74	23x23	543
	80	VT-720-80								34x29x74	25½x25½	610
3	80	VT-730-80	705	575	15.5	12.3	540	14.8	11.1	34x26x74	23x23	585
	80	VT-730-80								34x29x74	25½x25½	632
	120	VT-730-120								34x30x77	25½x25½	784
5	80	VT-735-80	705	850	23.0	18.3	845	23.0	17.3	34x26x74	23x23	581
	80	VT-735-80								34x29x74	25½x25½	648
	120	VT-735-120								34x30x77	25½x25½	800
	120	VT-737-120								707	515	27.9
7½	120	VT-745-120	707	730	39.4	31.2	655	35.4	26.9	44x30x75	25½x25½	915
10	120	VT-755-120	707	850	46.0	36.6	850	46.0	34.4	44x30x75	25½x25½	935

SAYLOR-BEALL Manufacturing Company warrants its compressors and parts when properly installed, lubricated and maintained as recommended and in accordance with good industry practice to be free from defects in material and workmanship under normal use and service. The responsibility of the Company under this warranty is limited to repair or replacement at the Company's factory, any compressor or part thereof, which shall, within one year after date of shipment to the original purchaser, be returned to the Company and which, upon examination, shall be found defective to the satisfaction of the Company. This warranty shall not apply to compressors or parts which have been subjected to misapplication, misuse, negligence or accident, to compressors or parts which have been repaired or tampered with outside the Company's factory when in the judgement of the Company, it appears that the reliability or stability of the compressor or part has been effected. Ordinary maintenance, such as adjustment and cleaning of equipment or components is the responsibility of the owner. All transportation and shipping charges shall be paid by purchaser. This warranty does not apply to electric motors or gasoline engines. These are covered by the Original Manufacturer's Warranty and should be returned by the purchaser to their authorized station for service. This warranty is expressly in lieu of all other warranties (except of title) expressed or implied and of any other obligations or liability on the part of the Company. There are no warranties of merchantability or of fitness for a particular purpose.