

4P14 4-POST LIFTS

Great features and an even better price! 4P14 models are manufactured to the highest Challenger standards and are ALI/ETL certified. Challenger's economy 4-post lifts are designed for long-lasting dependability with the budget service center in mind.



2212 Camplain Rd., Hillsborough, NJ 08844

Call for Sales, Service, & Installation

www.fclift.com **908.526.1500**



4P14EFX/4P14XFX
14,000 LB. CAPACITY

» Surface mounted 4-post lift

Challenger's 14,000 lb. closed-front drive-on 4-post lift features a low approach angle and wide runways for easy approach. It also has one of the highest rise in the industry and durable column construction. We designed the 4P14 for versatility, with lowered approach ramps as well as in two lengths. A range of optional accessories can help you accommodate just about anything that comes in for service.




Lowered approach ramps

CL Challenger Lifts

LOUISVILLE, KENTUCKY

SPECIFICATIONS

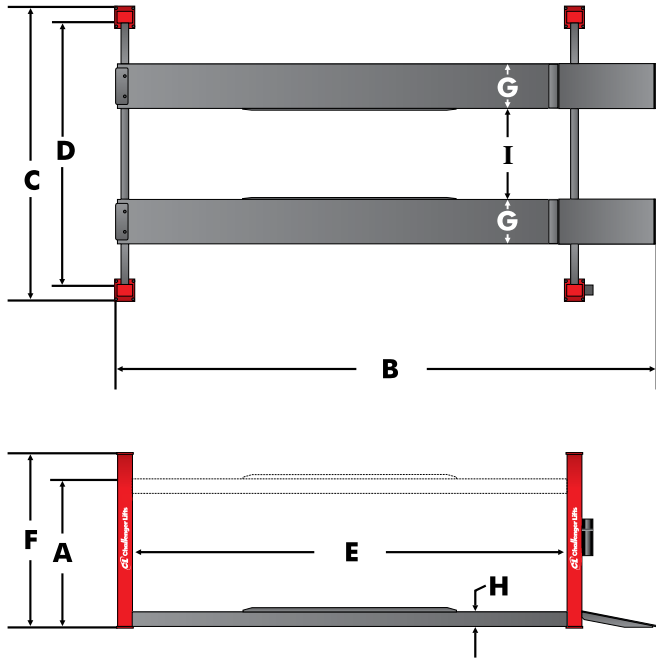

FEATURES & BENEFITS

- 14,000 lb. lift capacity
- Closed front design with either 182.5" (464 cm) or 210" (533 cm - extended) wheelbase to accommodate long vehicles
- 20" (508 mm) wide runways aid for drive-on confidence
- Louvered approach ramps provide superior traction for driving vehicles on and off ramp
- 78" (198 cm) rise height, among the highest rise in the industry, provides maximum head room for working underneath vehicles
- 14-level locking positions, allowing ergonomic working height for technicians to increase productivity and minimize fatigue
- Powder coat finish provides long-lasting durability
- Available with red or blue columns

OPTIONAL ACCESSORIES

- 7,500 lb. capacity air/hydraulic rolling jack (RJ7.5)
- Internal airline for dual rolling jack operation (40230-E/40230-X)
- Bolt-on alignment kit with powder-coated turn plates (40200-3D)
- Stainless steel turning radius gauges (10500SS)



Model Number	4P14EFX	4P14XFX
Lifting Capacity	14,000 lbs. (6,350 kg)	
Open or Closed Front	Closed	
Max. Wheelbase	182.5" (464 cm)	210" (533 cm)
A Rise Height	78" (198 cm)	
B Overall Length	245.75" (624 cm)	273.25" (694 cm)
C Overall Width	130.75" (332 cm)	
D Inside Columns	116" (295 cm)	
E Between Columns	196" (498 cm)	223.5" (568 cm)
F Height of Columns	90.5" (230 cm)	
G Width of Runways	20" (508 mm)	
H Height of Runways	7.25" (184 mm)	
I Width Between Runways	40" / 43" (1016 mm / 1092 mm)	
Air Supply Required	90-120 psi (6.2 - 8.3 bar)	
Std. Motor/Voltage	2HP, 208v-230v, 60Hz, 1Ph	
Speed of Rise	90 s	
Min. Rec. Bay Size	12' x 24' (366 x 732 cm)	12' x 26' (732 x 793 cm)
ALI/ETL Certified	√	√
Column Colors Avail.**	Red, Blue	

For more information, contact your Authorized Challenger Lifts Distributor:



2212 Camplain Rd., Hillsborough, NJ 08844

Call for Sales, Service, & Installation

www.felift.com **908.526.1500**

800-648-5438 | 502-625-0700 | Fax: 502-625-0711 | Email: sales@challengelifts.com
2311 South Park Road | Louisville, KY 40219

