



2212 Camplain Rd., Hillsborough, NJ 08844

Call for Sales, Service, & Installation

www.fclift.com **908.526.1500**



BIPARK AND TRIPARK

**DEPENDENT DOUBLE AND TRIPLE STACKERS FOR PARKING OR STORAGE APPLICATIONS
DESIGNED AND BUILT IN ITALY, AND USED BY THE WORLD'S
PREMIUM CAR MANUFACTURERS**

BIPARK AND TRIPARK

DEPENDENT CAR STACKER

5,700 TO 7,000 LB./2.6T TO 3.2T CAPACITY PER PLATFORM

RUGGED, COMPACT AND DESIGNED FOR REPEATABILITY



BIPARK AND TRIPARK

5,700 TO 7,000 LB./2.6T TO 3.2T CAPACITY PER PLATFORM

AT OMER USA, OUR GOAL IS TO BUILD LIFTS THAT LAST LONGER, PERFORM BETTER, AND COST LESS TO OPERATE.

SPECIFICATIONS	BIPARK			TRIPARK 25
	BIPARK 26	BIPARK 26 H 21	BIPARK 32	
Capacity per platform	5,727 lb./2.6T	5,727 lb./2.6T	7,048 lb./3.2T	5,510 lb. / 2.5T
Standard Lifting Heights *	72.8"/1.850mm	82.7"/2.100mm	82.7"/2.100mm	70.5" - 66.9" - 76" 1.790mm - 1.700mm - 1.930mm
Standard Platform *	72.8" x 142.5"	86.6" x 142.5"	94.5" x 142.5"	81.5" x 142.5" / 85.6" x 142.5"
Net Height *	9.8"/3.000mm	11.2"/3.420mm	11.2"/3.420mm	19.3"/5.800mm
Power	2.0 hp/1.5 kw	2.0 hp/1.5 kw	2.0 hp/1.5 kw	3.4 hp/2.5 kw
Up/down Travel Time	52/45s	52/45s	52/45s	40/20s (lower platform) 75/40s (upper platform)
Power supply	220V/1Ph/50-60Hz	220V/1Ph/50-60Hz	220V/1Ph/50-60Hz	230V-460V/3Ph/50-60Hz
Standard Weight	2,247 lbs/1.020 Kg	2,643 lbs/1.200 Kg	2,863 lbs/1.300 Kg	5,066 lbs/2.300 kg
Part Number	OMR-BIPK26	OMR-BIPK26H21	OMR-BIPK32	OMR-TRIPK25

* Standard dimension listed - Dimensions can be customized per application





FEATURES

- Built to a higher standard of quality; made in Italy by O.M.E.R S.p.A., a world leader in Vehicle Lift Manufacturing with over 40 years' experience.
- Compact design—utilizing a minimal footprint, optimizing efficiency and allowing for the maximum number of vehicles in a given space.
- Safety and convenience—the electrically-actuated mechanical-locking device guarantees a safe locking position at 1" intervals, while the unique torsion bar ensures that the platform remains constantly parallel and can be safely stopped at any height.
- Efficiency & Longer Life Time – The platform carriage is guided by wheels and reinforced nylon guides, reducing the friction between the column and carriage and lowering the power needed for operation. Channeled galvanized platforms reduce rust & drain water away from the vehicle below.
- Flexibility – uniquely balanced and reinforced to allow vehicles to be parked facing either forward or backward, with no need for weight to be evenly distributed.

OPTIONAL ACCESSORIES

- Hot-Dipped Galvanization for outdoor use
- Non-standard power supply 230V-460V / 3Ph / 50-60Hz
- Waterproof galvanized cover for control unit for outdoor installation
- Waterproof push button board IP 54
- Limit switches/vehicle detecting photocell for electronic collision prevention

EQUIPMENT FOOTPRINT

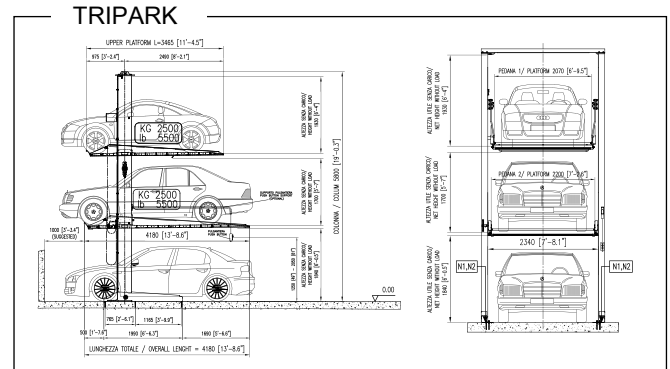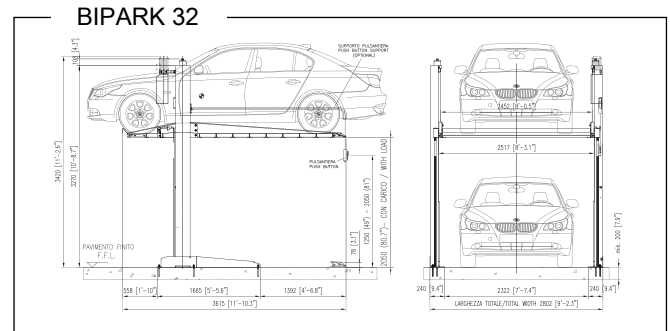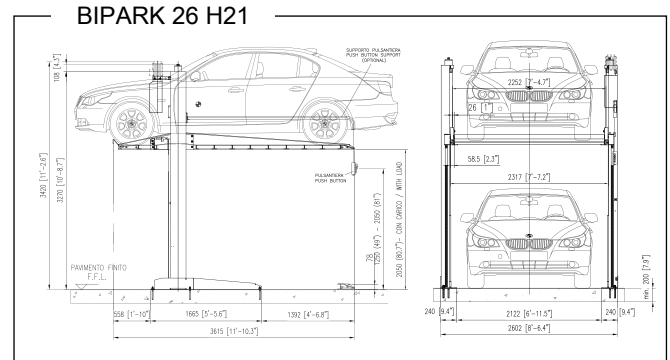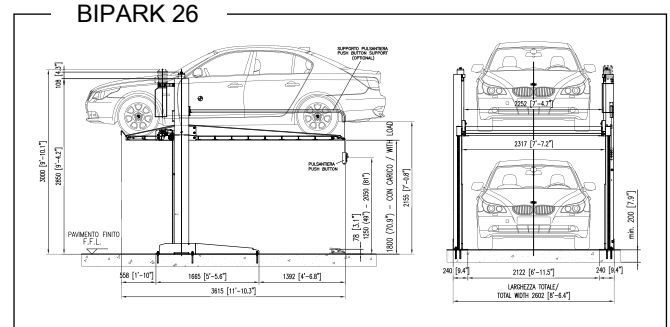

CONTACT US NOW

WWW.OMERINC.COM

CALL +1(470) 275-5919



2212 Complain Rd., Hillsborough, NJ 08844

Call for Sales, Service, & Installation

www.flift.com 908.526.1500



OMER®