



2212 Camplain Rd., Hillsborough, NJ 08844

Call for Sales, Service, & Installation

www.fclift.com 908.526.1500




# DX77

## SITE SPECIFICATIONS

- **BAY HEIGHT:** Rise height + height of vehicle
- **BAY WIDTH:** 10' recommended
- **BAY DEPTH:** 24' recommended
- **POWER REQ.:** 208-230v Single Phase\*, 30-amp breaker
- **MIN. CONCRETE SPEC:** 4" thick, reinforced, free from cracks/seams, rated at 3500+ psi, cured at least 28 days
- **AIR REQUIRED:** 90-120 psi

## SERVICE BAY LAYOUT

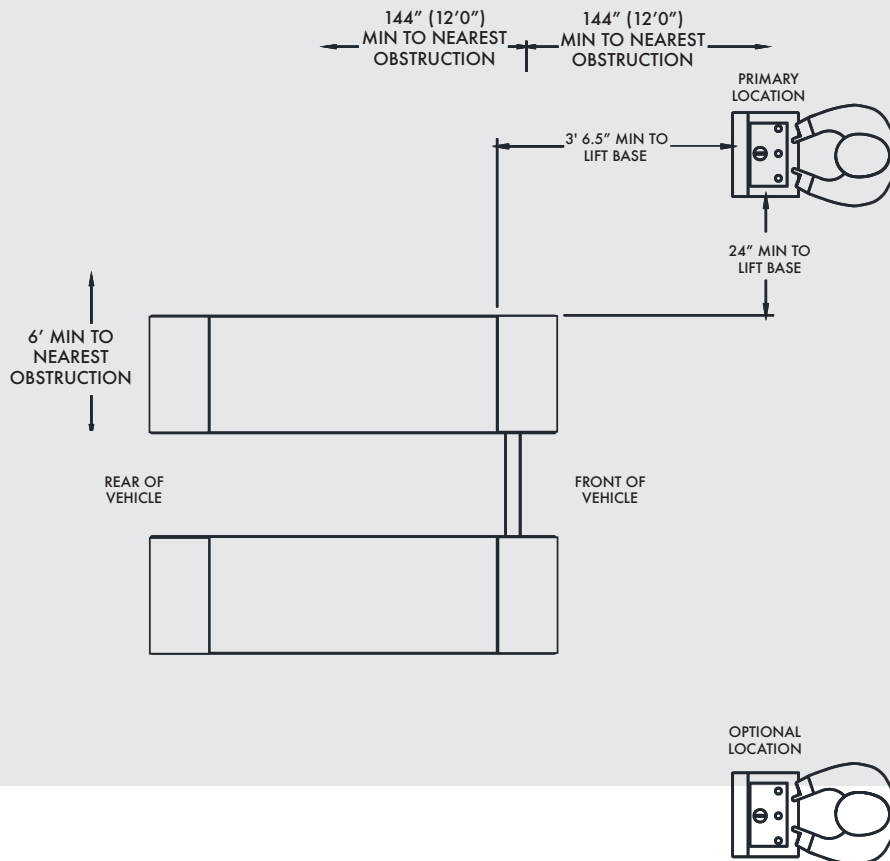

Model Number	DX77	DX77R
Lifting Capacity	7,700 lbs.	
Installation	Standard	Flush Mount
Rise Height	74.5"	70"
Overall Length	83.25"	
Overall Width	82"	69.5"
Platform Length	59"	
Platform Width	24.5"	
Width Between Platforms	21-27"	
Ramp Length	11.75"	
Lowered Height	4.5"	-
Motor	2HP, Single Phase, 60Hz	
Voltage	208/220v	
Air Supply Required	90 - 120 psi	
Speed of Rise	43 s	
Max Load per Platform	3,850 lbs.	
Colors Available	■	

\*3-phase upgrade is available for purchase

www.challengerlifts.com  
1-800-648-5438